


Drop Shape Analyzer

DSA100L

Specifications

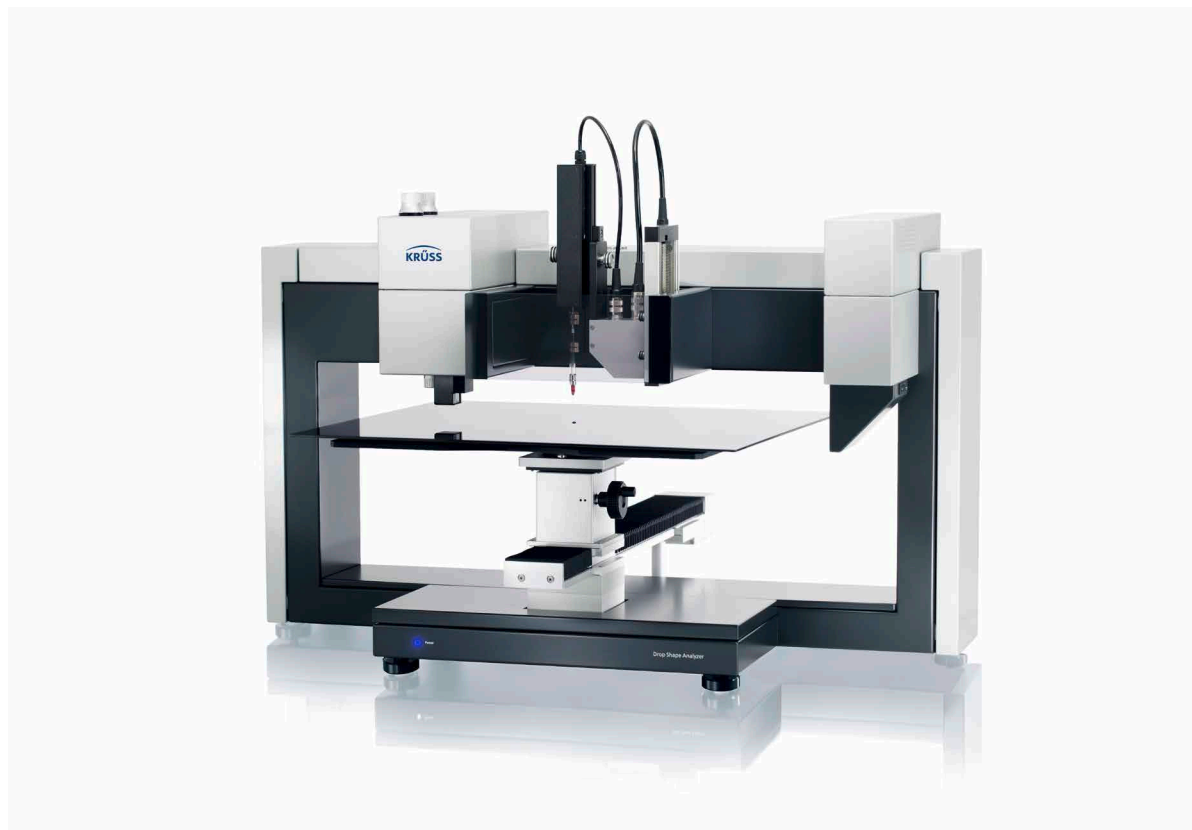

Product group specifications

DSA100L

Camera system CF04 (standard)

Connection	USB 3.0
Resolution	1920 × 1200 px
Frame rate	2300 fps
Dark noise	7 electrons
Dynamic range	73 dB

High speed camera system CF06 (optional)

Connection	USB 3.0
Resolution	640 × 480 px
Frame rate	3400 fps
Dark noise	10.5 electrons
Dynamic range	56.6 dB

Optics

Focus	manual
Zoom	7× zoom, manual
View angle	±4°
Field of view	with CF04: 3.9 × 3.9 to 24.7 × 24.7 mm with CF06: 1.7 × 1.3 to 10.8 × 8.1 mm
Resolution	with CF04: 3.1 to 21.7 μm with CF06: 2.5 to 17.8 μm

Illumination

Type	high power monochromatic LED
Wave length, dominant	470 nm
Field of light	46 mm × 46 mm (D × H)

Dosing system

Dosing	software-controlled
Drop deposition	software-controlled
Syringes, volume	glass (450 μL), disposable (900 μL)
Resolution	0.1 μL
Speed	0.02 to 25 μL/s

Product group specifications
DSA100L
Liquid Needle double pressure dosing (optional)

Control	software-controlled
Speed	fixed (fast jet)
Resolution	0.1 μ L
Cartridge, volume	disposable, 1 mL

Stages

	y-axis	z-axis		rotation axis
Control	software-controlled	manual	SW-controlled (opt)	software-controlled
Range	350 mm	45 mm	38 mm	360°
Resolution	10 μ m	16 mm/turn	10 μ m	0.1°
Accuracy	100 μ m	-	100 μ m	1°

Tilting (optional)

Type	internal
Control	software-controlled
Range	0 to 90°
Resolution	0.01°
Accuracy	0.3°

Software
ADVANCE

Contact angle	recommended
Surface free energy of solids	recommended
Interfacial and surface tension of liquids	pendant drop, rising drop (optional) Constrained Sessile Drop (optional)

Measurement specifications
DSA100L
Sessile drop/captive bubble

Result	contact angle
Range (software-based)	0 to 180°
Resolution (software-based)	0.01°
Accuracy (instrument-based)	0.1°
Models	conic section, polynomial, circle, Young-Laplace, height-width
Types	advancing, receding, static, dynamic, tilting

Surface free energy of solids

Results	surface free energy (SFE), polar & disperse part, acid & base part, H-bond part
Models	equation of state, Zisman, Fowkes, Wu, Owens-Wendt-Rabel-Kaelble, extended Fowkes, acid-base theory

Pendant drop/rising drop

Results	interfacial and surface tension
Range (software-based)	0.01 to 2000 mN/m
Resolution (software-based)	0.01 mN/m
Model	Young-Laplace
Types	static, dynamic

General specifications
DSA100L
Sample dimensions

Maximum sample space	700 mm × ∞ × 275 mm (W × D × H, without axes)
Maximum measuring surface	500 mm × 500 mm (W × D)

Temperature measurement

Range	-50 to 400 °C
Resolution	0.1 °C
Precision	0.1 °C
Accuracy	1/3 DIN B (±0.1 °C at 0 °C to ±0.8 °C at 400 °C)
External sensor	2 connectors (PT100)
Location	environment air

Housing and peripherals

Compartment	test liquids protected against light
Needle protection shield	yes
Camera and optics housing	yes
Levelling	yes

Environment

Operating temperature	10 to 40 °C
Humidity	without condensation

Instrument dimensions

Footprint	1000 mm × 375 mm (W × D)
Height	490 mm
Weight (without accessories)	34 kg

Power supply

Voltage (AC)	88 to 264 V
Power consumption	100 W
Frequency	50 to 60 Hz

Interfaces

PC	USB 3.0
----	---------